P 240 A Smart




THE BEST SOLUTION FOR EFFICIENT OPERATIONS IN TERMS OF PERFOR-MANCE, SIZE AND RELIABILITY






WORKING DIAGRAMS

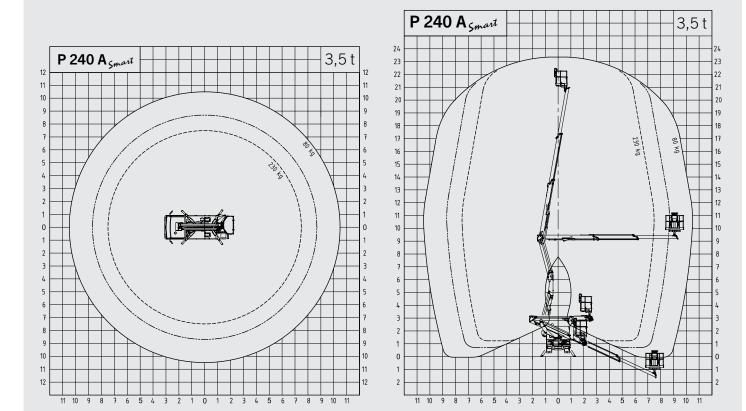

DIMENSIONS

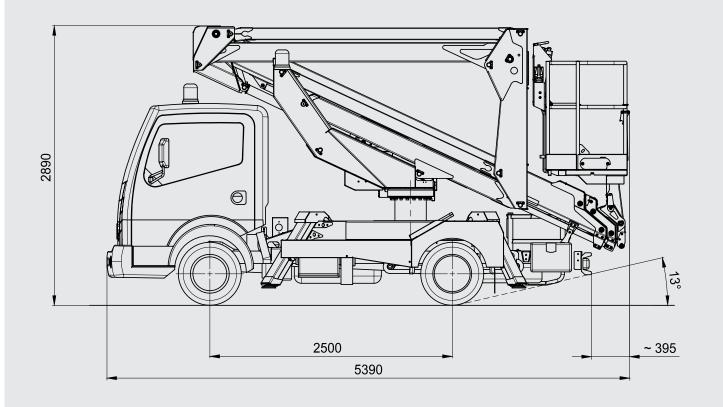

Shortest machine in its class



- ↗ Small & clever for use in city centres
- **7** Compact design and easy operation
- Fully hydraulic operation
- ◄ Ergonomic design
- Flexible access to heights thanks to combination of joint and telescope
- High manoeuvrability thanks to the extremely short wheelbase
- ↗ Safe working
- Professional PALFINGER quality

TECHNICAL SPECIFICATIONS


Max. working height	23.2 m
Max. basket bottom height	21.2 m
Max. outreach	10.2 m
Angle of main boom	-25° to + 80°
Rotation angle of turntable	370°
Rotation angle of basket	2 x 90°
Basket load	230 kg
Size of basket	1.4 x 0.85 x 1.1 m
Height in transport position	2.89 m
Width in transport position	2.1 m
Total length	5.39 m
Total weight	3350 kg

OPTIONAL

Fiberglass basket
Insulation 1000 V
Aluminium Side bars 200 mm
Electric motor 230 V
Working adjustable light 60 W on the basket
Customised paintwork boom

LIFETIME EXCELLENCE

THE RESULT IS PALFINGER ACCESS PLAT-FORMS FEATURING THE MOST STATE-OF-THE-ART HEIGHT TECHNOLOGY THAT ACHIEVE ABSOLUTE PEAK PERFORMANCES, EVEN WHEN CONFRONTED WITH THE MOST DIFFICULT OF JOBS IN PRACTICE. DEVELO-PED FOR THE GLOBAL MARKET, DESIGNED FOR THE FUTURE.

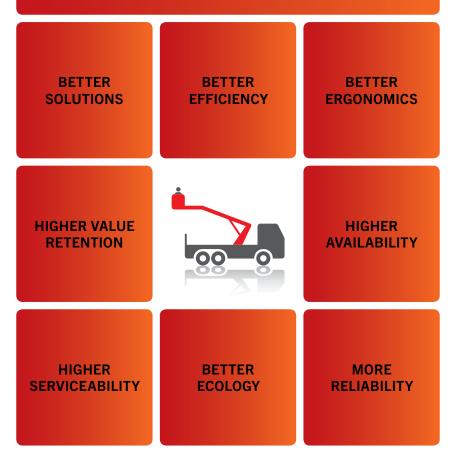

For further information please visit: www.palfinger.com/thebrand

Units shown in the leaflet are partially optional equipped and do not always correspond to the standard version. Country-specific regulations must be observed. Dimensions may vary. Subject to technical changes, errors and translation mistakes.